
FLOATING

FOUNTAI



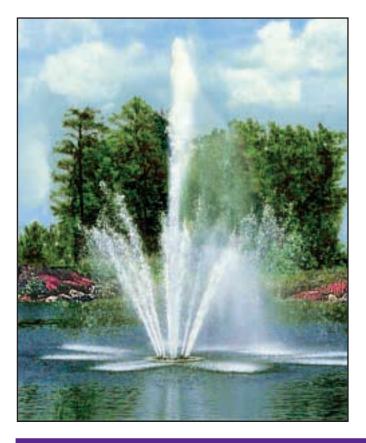

# **AERATIONJET**<sup>TM</sup>

combination of majestic heights, graceful archs and superior wind resistance, The AerationJet is the ideal overall water feature with heavily aerated jets reaching 50' high and spreading to 60' diameter. The AerationJet provides a dramatic effect to any lake.

Powered by a U.L. listed heavy-duty submersible turbine pump, the AerationJet standard equipment includes a complete U.L. listed control panel.

All fountain components are fully waterproof and made of the finest corrosion resistant materials to provide years of dependability and high performance.

# **FEATURES**

#### **FLOTATION**

- U.V. resistant rotocast unit
- Four seamless, watertight compartments for ballast
- Brass fillplugs
- Five-year warranty

### **CONTROL PANEL**

- U.L. listed per National Electrical Code
- Weatherproof steel enclosures

#### **CABLE**

 STW-A rated, U.L. listed underwater cable

### **PUMPS**

- High performance submersible turbines provide years of dependability and service
- Franklin stainless steel sealed motors

### **NOZZLE**

 Brass/bronze precision machined Aeration nozzles

#### CORROSION RESISTANT

- Cast brass/bronze nozzles
- Rotocast float
- Stainless steel frame and fastenings
- Bronze/copper lights


#### LIGHTS

- Cast bronze/copper housing
- Stainless steel brackets
- ◆ Neoprene gaskets
- ◆ Tempered lenses
- Bronze/stainless steel lens protectors

#### BENEFITS TO LAKE

- Aesthetics beautifies waterway
- Increases property value and quality of community
- Adds decor to community
- Assists in aeration of lake system, aiding in fish dynamics
- Through agitation, prevents aggregation of planktonic algae on the surface and helps in reduction of mosquito larvae

# **AERATIONJET** TA

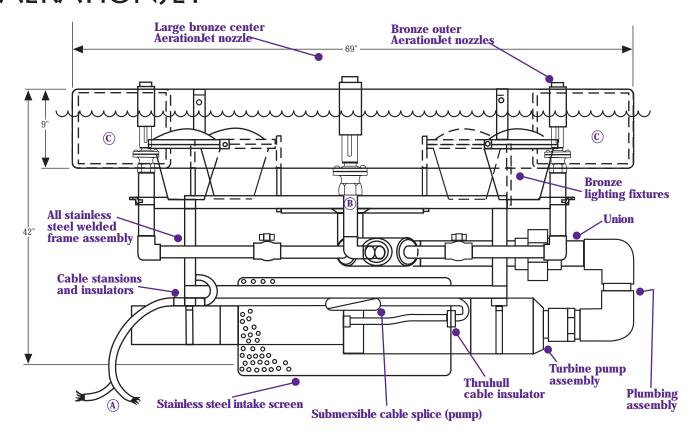

Α	STW-A	submersible	cable	(numn	&	lights'

B Bronze submersible junction box (lights)

## DISPLAY SPECIFICATIONS

HP	CENTER HT	# SIDE HT	# SIDE JETS	# LIGHTS	TOTAL WATTAGE	AVAIL. PHASE
5	20'	10'	6	8	4000w	1,3
7,5	25'	12'	6	8	4000w	1,3
10	30'	15'	6	8	4000w	1,3
15	35'	20'	8	9	5000w	1,3
20	40'	20'	8	9	5000w	3
30	50'	25'	8	9	5000w	3

# LIGHTING SPECS

Total Wattage	500	1000	1500	2000	2500	3000	3500	4000	Ī
AMP Draw	5	10	15	20	25	30	35	40	



2100 NW 33rd Street / Pompano Beach, FL 33069 (800) 432-4302 / Fax (954) 977-7877 www.vertexwaterfeatures.com / e-mail: info@vertexwaterfeatures.com

(208V MOTORS AVAILABLE)

PUMP AMPERAGE

HP	230v1Ø	230v3Ø
5	28	17
7,5	42	25
10	51	32
15	72	47
20	-	61
30	-	94

Because of the electric equipment involved, floating fountains are not designed for waterways where swimming or water sports are permitted. Specifications recorded during calm wind conditions.

Install all electrical equipment in accordance with Article 680 of the National Electrical Code and all local codes. Vertex Water Features reserves the right to improve and change our designs and/or specifications of our fountains without notice or obligation.

© 2005 Vertex Water Features

C (4) separate ballast compartments with brass fill plugs